


**Keynotes:**

- Profile for oiled or stained weatherboards only.
- All nail fixings pre-drilled min. 1mm diameter smaller than the nail gauge.
- All NZ NATURAL TIMBER CO Ltd timber products to be pre-coated and cut ends and edges and all fresh cut surfaces double coated and sealed before fixing. All timbers are to be coated as per Dryden 's specification.
- Profiles as per NZS 3617, Branz Bulletin 411, and/or compliance achieved through in-service history, length of service not less than 15 years in all NZ environments B2/VM1 1.1.1 (a).
- Timber to comply with NZBC B2 Durability B2.3.1 (b).
- Profiles shall be fixed in accordance with E2/AS1 Table 24.

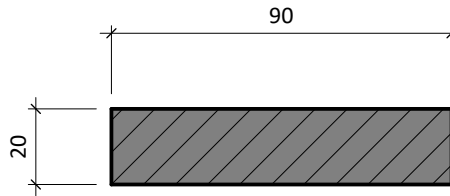

ST153 D4S Batten Screening

**Finish:**

- DF/S (Dressed face sanded)
- Dressed face pre-coated boards must be face sanded prior to coating.

Address: 68 /10 Marsden Bay Drive, Marsden Cove, Northland

Phone: 0800 NATIVE

Email: [sales@nznaturaltimber.co.nz](mailto:sales@nznaturaltimber.co.nz)

Website: [www.sales@nznaturaltimber.co.nz](http://www.sales@nznaturaltimber.co.nz)

Drawing  
**ST153**

Scale  
1 : 2 at A4

Title  
**90x20mm Profile**

Date  
04-11-2025

**NZ NATURAL  
TIMBER COMPANY**