
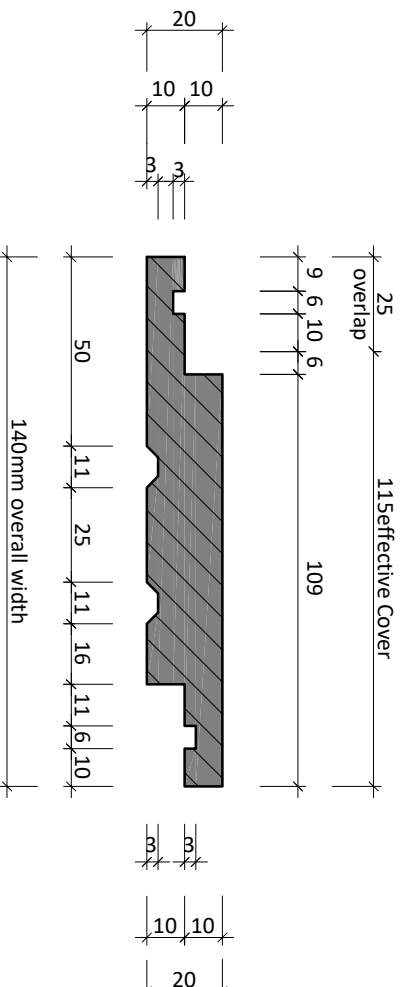


- Keynotes:**
- Profile for oiled or stained weatherboards only.
  - All nail fixings pre-drilled min. 1mm diameter smaller than the nail gauge.
  - All NZ NATURAL TIMBER CO Ltd timber products to be pre-coated and cut ends and edges and all fresh cut surfaces double coated and sealed before fixing. All timbers are to be coated as per Dryden 's specification.
  - Profiles as per NZS 3617, Branz Bulletin 411, and/or compliance achieved through in-service history, length of service not less than 15 years in all NZ environments B2/VM1 1.1.1 (a).
  - Timber to comply with NZBC B2 Durability B2.3.1 (b).
  - Profiles shall be fixed in accordance with E2/AS1 Table 24.

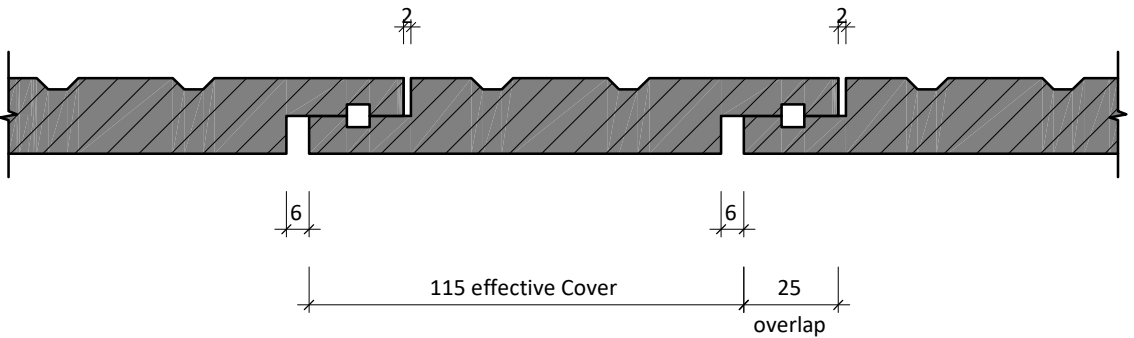

Sugi Japanese Cedar  
140x20mm 6mm Neg  
Interlocking Vertical  
Shiplap Profile

**Finish:**

- DF/S (Dressed face sanded)
- BSF (or Band sawn finish sanded/denibbed)
- Dressed face pre-coated boards must be face sanded prior to coating.

Address: 28 Gargan Road, Tauriko, Tauranga 3171  
Phone: +64 27 660 0095  
Email: hello@sugi.nz  
Website: www.sugi.nz

Drawing **ST55**  
Scale 1 : 2 at A4

Title **140x20mm 6mm Neg Profile**  
Date 03-06-2026  
Revision 01

